




# CLEVER LIGHT CL-812 SLAVE/MB



<b>Luminaire</b>	Addressable with main battery
<b>Mounting</b>	Concealable
<b>Lamp</b>	LED/50 000h
<b>Lamp power</b>	2W
<b>Warranty</b>	2 years repair warranty
<b>Standby duration</b>	1-3h
<b>Housing</b>	Polycarbonate
<b>Color of housing</b>	White
<b>Operation</b>	Standby
<b>Mains supply</b>	120-240VAC 50-60 Hz
<b>Input current</b>	30mA
<b>Battery</b>	Ni-Mh
<b>Protection category</b>	IP65
<b>Certification</b>	CE, TÜV

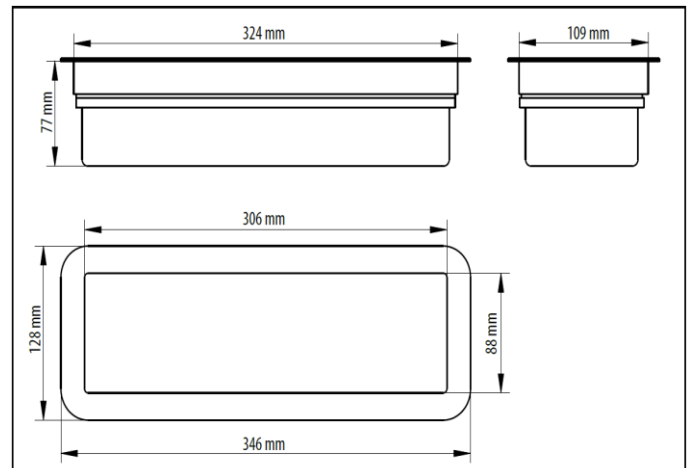

CL-812 Mounting height (m)	Escape route 2m wide 1 lux min				Open (anti-panic) area 0.5 lux min			
	Transverse to wall	Transverse to transverse	Axial to wall	Axial to Axial	Transverse to wall	Transverse to transverse	Axial to wall	Axial to Axial
2.5	3.4	8.7	2.85	7.15	4.4	10	3.65	8.75
3	3.55	9.25	3.1	7.6	4.7	11.7	3.85	9.55
4	3.6	10	3.15	8.2	5	13	4.15	10.55
6	3.15	9.85	3.2	8.8	4.95	14.35	4.45	11.65
8	1.4	8.75	1.2	8.9	4.6	14.25	4.6	12.4
10	1	4	0.3	5.4	3.4	13	3.3	12.4