




# CLEVER LIGHT CL-816 SLAVE/MB

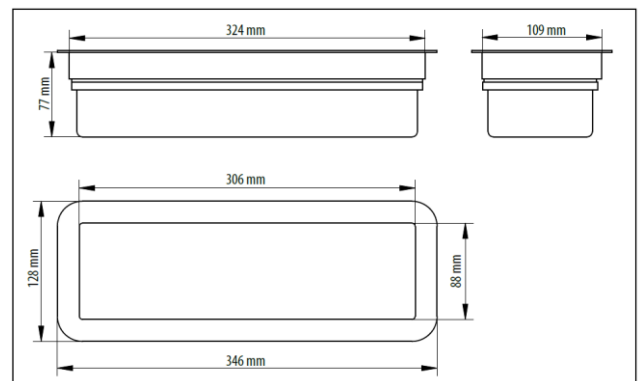

<b>Luminaire</b>	Addressable with main battery
<b>Mounting</b>	Concealable
<b>Lamp</b>	LED/50 000h
<b>Lamp power</b>	6W
<b>Warranty</b>	2 years repair warranty
<b>Standby duration</b>	1-3h
<b>Housing</b>	Polycarbonate
<b>Color of housing</b>	White
<b>Operation</b>	Standby
<b>Mains supply</b>	120-240 VAC 50-60 Hz
<b>Input current</b>	30mA
<b>Battery</b>	Ni-Mh
<b>Protection</b>	IP65
<b>Certification</b>	CE, TÜV, UL

CL-816 Mounting height (m)	Escape route 2m wide 1 lux min				Open (anti-panic) area 0.5 lux min			
	Transverse to wall	Transverse to transverse	Axial to wall	Axial to Axial	Transverse to wall	Transverse to transverse	Axial to wall	Axial to Axial
2.5	5	12	4.4	10.8	6.05	15.75	5.5	13.25
3	5.4	13	4.6	11.4	6.55	16	5.8	14.2
4	5.9	14.65	5	12.65	7.4	17.95	6.4	16
6	5.55	15.9	5.4	14.15	8.4	21.45	7.2	18
8	5.8	15.2	5.5	14.9	7.8	23	7.7	19.8
10	3.8	16	5	15.6	8.5	21	8	20.6