




Luminaire	Addressable with central battery
Mounting	On sidewall or ceiling
Lamp	LED/50 000h
Lamp power	6W
Warranty	2 years repair warranty
Standby duration	-
Housing	Polycarbonate
Color of housing	White
Operation	Standby
Mains supply	120-240 VAC 50-60 Hz
Input current	30mA
Battery	Central battery
Protection	IP65
Certification	CE, UL

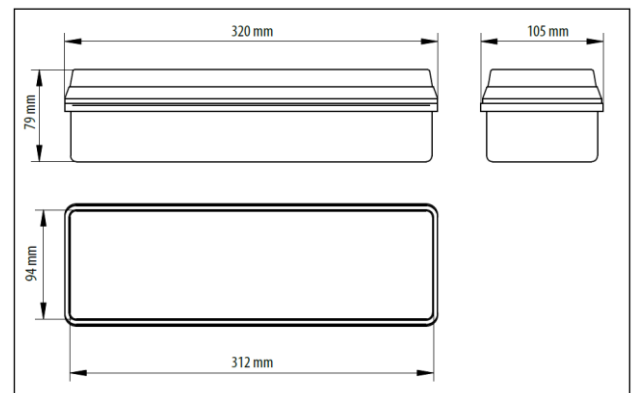

CL-616	Escape route 2m wide 1 lux min				Open (anti-panic) area 0.5 lux min			
	Mounting height (m)	Transverse to wall	Transverse to transverse	Axial to wall	Axial to Axial	Transverse to wall	Transverse to transverse	Axial to wall
2.5	5	12	4.4	10.8	6.05	15.75	5.5	13.25
3	5.4	13	4.6	11.4	6.55	16	5.8	14.2
4	5.9	14.65	5	12.65	7.4	17.95	6.4	16
6	5.55	15.9	5.4	14.15	8.4	21.45	7.2	18
8	5.8	15.2	5.5	14.9	7.8	23	7.7	19.8
10	3.8	16	5	15.6	8.5	21	8	20.6