





# CLEVER LIGHT CL-6016 SLAVE/MB

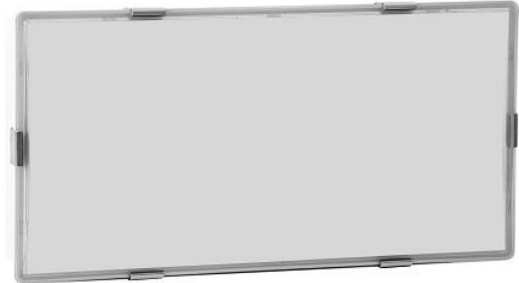

<b>Luminaire</b>	Addressable with main battery
<b>Mounting</b>	On sidewall or ceiling
<b>Lamp</b>	LED/50 000h
<b>Lamp power</b>	6W
<b>Visual range</b>	25 meters
<b>Warranty</b>	2 years repair warranty
<b>Standby duration</b>	1-3h
<b>Housing</b>	Polycarbonate
<b>Color of housing</b>	White
<b>Operation</b>	Standby
<b>Mains supply</b>	120-240V 50-60 Hz
<b>Input current</b>	30mA
<b>Battery</b>	Ni-Mh
<b>Protection</b>	IP65
<b>Certification</b>	CE, UL

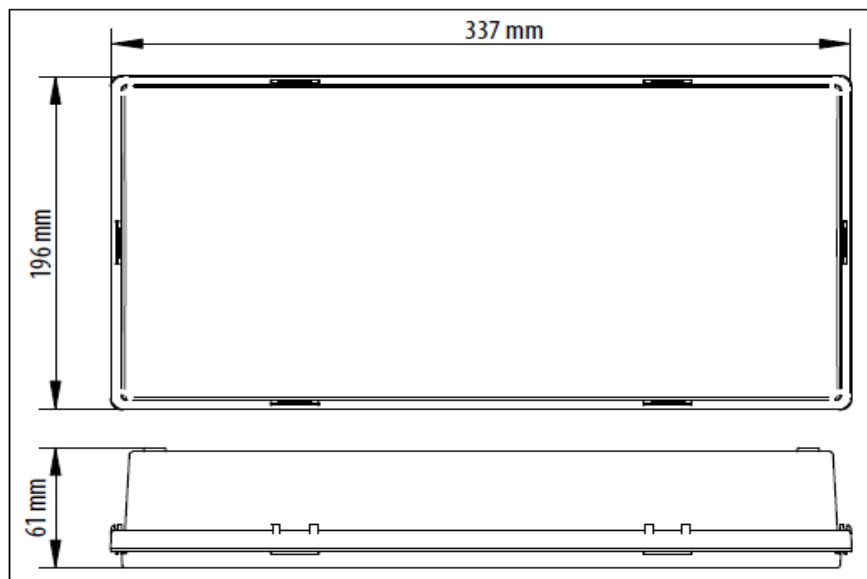

CL-6016	Escape route 2m wide 1 lux min				Open (anti-panic) area 0.5 lux min			
Mounting height (m)	Transverse to wall	Transverse to transverse	Axial to wall	Axial to Axial	Transverse to wall	Transverse to transverse	Axial to wall	Axial to Axial
2.5	4,29	9,47	4,15	9,94	2,16	6,07	2,12	5,97
3	4,44	10,87	4,17	11,08	2,06	6,13	1,96	6,08
4	4,82	12,5	4,78	11,77	1,26	5,81	1,19	5,67
6	4,61	13,77	4,54	13,53	0	1,22	0	1,13
8	3,7	13,43	3,73	13,29	0	0	0	0
10	0	11,88	0	12,06	0	0	0	0
15	0	0	0	0	0	0	0	0