

Sign board IP 54 • EN54-3 Compliant • Series 5900

- Self-extinguishing thermoplastic structure
- IP54 Protection Degree
- High power acoustical output
- CPD certified

UNI EN54-3:2001+A1:2002+A2:2006 0051

The optical/acoustic sign board series 5900 is suited to any risk condition such as fire, flooding, gas leaks, etc., whenever visual and/or acoustic information is required. The IP 54 protection degree allows usage in both indoor and outdoor environments, even in humid and dusty conditions, while the high powered internal sounder generates a sound output of 88 dB at 1m.




The sign board is supplied with the standard message label “FIRE ALARM”, while other message labels “EVACUATE PREMISES” and “EXTINGUISHING IN PROGRESS” are also available to order as accessories.

CPD certified in accordance with UNI EN54-3:2001 +A1:2002 +A2:2006.

General specifications

Housing material	Self-extinguishing thermoplastic
Connection type	Terminals
Operating Temperature	-10°C / +50°C
Protection degree	IP 54
Acoustical Specifications	Sound output 88 dB (A) @ 1m Sound frequency: 2160 Hz ± 30 Hz
Packaging	1 pc. / package

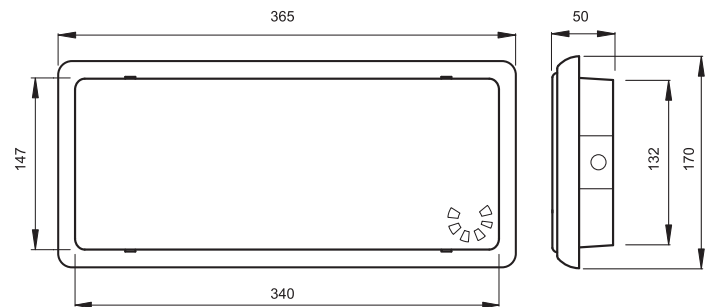

Order codes for panels

Code	Rated voltage	Rated current	Lamp	Flash frequency	Package weight
5955-CSA	From 10,8 Vcc a 28 Vcc	200 mA @ 12V 100 mA @ 24V	High brightness LED	Steady light or 60/min	0,9 Kg

Accessories

FIRE ALARM	EVACUATE PREMISES	EXTINGUISHING IN PROGRESS
CSA08584	CSA08587	CSA08589