

METAL COLUMN LOUDSPEAKER

➤ MCS80T/EN ➤ MCS80T/ENC

EN54-24



TECHNICAL SPECIFICATIONS

EN54-24:2008

Certificate No: 0359-CPD-0165 TYPE B

ELECTRICAL

Rated power, Watts	80
Tappings 100 volt line, Watts	80/40/20/10
Transformer Impedance, Ohms 100V	125/250/500/1k
Tappings 70.7 volt line, Watts	40/20/10/5
Driver impedance, Ohms	4
Effective Frequency Range, Hz (BSEN60268-5)	180 - 18k
S.P.L. @ 4m, 1watt, dB, 1/3 Octave, 1KHz	71
S.P.L. @ 1m, 1watt, dB, Test Signal Bandwidth 100Hz-10kHz	96
S.P.L. @ 4m, Full power, dB, 1/3 Octave 1KHz	91
S.P.L. @ 1m, Full power, Test Signal Bandwidth 100Hz-10kHz	115
Dispersion at 1k/2k Hz, Degrees	200/70 (horizontal) 140/40 (vertical)

ENVIRONMENTAL

IP-Rating	33
Max/Min Amb Temp	70°/-25°C
Relative Humidity	≤95%

MECHANICAL



Dimensions, height, front and depth, mm	970 x 98 x 90
Net Weight, Kgs	6.0
Colour (Unless Specified)	RAL9016
Material	Aluminium
Mounting	Steel L bracket, optional swivel bracket PEN1066

➤ MCS80T/ENC is supplied with capacitor for DC line monitoring

MCS80T/EN

MCS80T/ENC

METAL COLUMN LOUDSPEAKERS

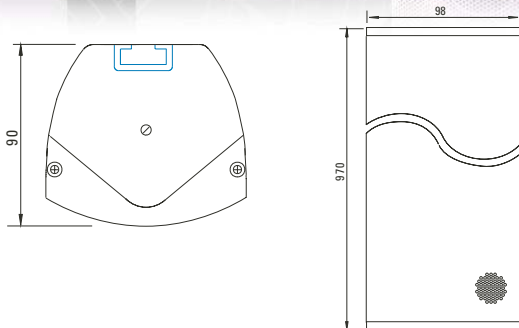

MCS80T/EN
MCS80T/ENC
*with capacitor


**WITH TRANSFORMER:
100V/70V LINE**

	WHITE WIRE PLUS TAPPING					BLACK
100V	10W	20W	40W	80W	OFF	COM
70V	5W	10W	20W	40W	OFF	COM
IMP (Ω)	1K	500	250	125	∞	

DISPERSION ANGLES

		HORIZONTAL	VERTICAL
1 OCT. PINK NOISE	500 Hz	360°	60°
1 OCT. PINK NOISE	1K Hz	200°	70°
1 OCT. PINK NOISE	2K Hz	140°	40°
1 OCT. PINK NOISE	4K Hz	90°	30°

FREQUENCY RESPONSE

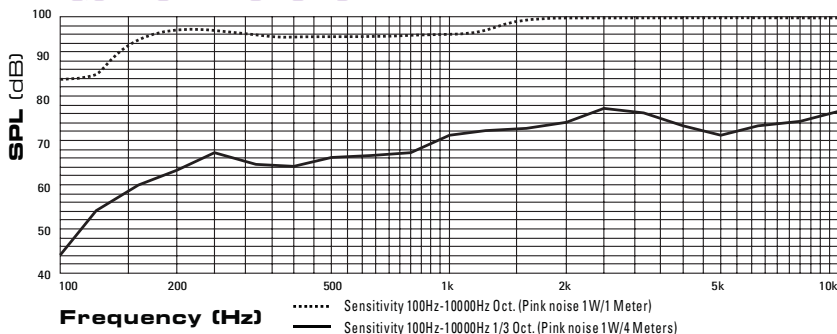

*Active Equalizer Applied: NO

The MCS80T/EN & MCS80T/ENC have been tested for 100 hours at a maximum power of 80W. Both units did not deviate by more than +/- 3dB. The frequency response and impedance curves remained constant throughout the test period. All results are in full compliance with the requirements of EN54-24



Penton UK Ltd

Unit 2 Teville Industrials | Dominion Way | Worthing | West Sussex | BN14 8NW
T: +44 (0)1903 215315 | F: +44(0)1903 215415 | E: SALES@PENTONUK.CO.UK

www.pentonuk.co.uk

