




CLEVER LIGHT CL-4014 R/F SLAVE/CB

(RECESSED TYPE)



Luminaire	Addressable with central battery
Mounting	Concealable
Lamp	LED/50 000h
Lamp power	4W
Visual range	46 meters
Warranty	2 years repair warranty
Standby duration	-
Housing	Polycarbonate
Color of housing	White
Operation	Standby
Mains supply	120-240V 50-60 Hz
Input current	30mA
Battery	Central battery
Protection category	IP20
Certification	CE, UL
R/F	R-circular emitting lens, F-for corridors

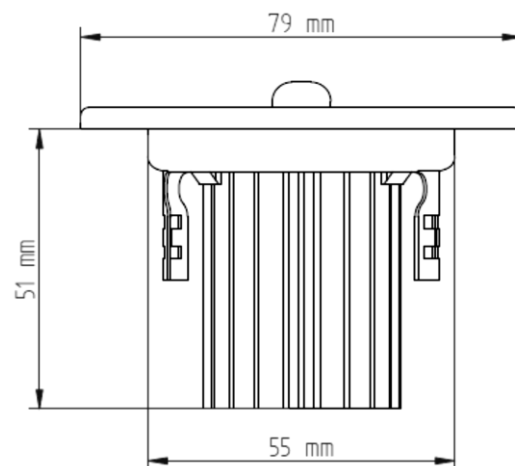

CL-4014R	Escape route 2m wide 1 lux min				Open (anti-panic) area 0.5 lux min			
Mounting height (m)	Transverse to wall	Transverse to transverse	Axial to wall	Axial to Axial	Transverse to wall	Transverse to transverse	Axial to wall	Axial to Axial
2.5	4,02	10,2	4,02	10,21	5,1	12,69	5,1	12,68
3	4,21	10,86	4,21	10,88	5,43	13,64	5,44	13,63
4	4,37	11,78	4,37	11,8	5,89	15,13	5,9	15,14
6	3,93	12,37	3,93	12,39	6,18	16,91	6,19	16,92
8	1,81	11,53	1,77	11,53	5,76	17,5	5,76	17,52
10	0	7,52	0	7,52	4,43	17,1	4,42	17,11
15	0	0	0	0	0	8,1	0	8,1

CL-4014F	Escape route 2m wide 1 lux min				Open (anti-panic) area 0.5 lux min			
Mounting height (m)	Transverse to wall	Transverse to transverse	Axial to wall	Axial to Axial	Transverse to wall	Transverse to transverse	Axial to wall	Axial to Axial
2.5	6,69	16,02	1,76	4,35	8,01	18,87	2,17	12,17
3	7,24	17,59	1,96	4,59	8,79	20,88	2,29	9,88
4	8	20,08	2,28	5,39	10,04	24,29	2,69	6,36
6	5,04	21,91	2,51	6,65	11,51	29,18	3,32	7,93
8	2,84	15,19	1,78	7,12	7,59	31,92	3,56	9,19
10	0	11,14	0	5,05	5,57	27,35	3,26	9,92
15	0	0	0	0	0	12,16	0	6,2