




# CLEVER LIGHT CL-813 SLAVE/CB

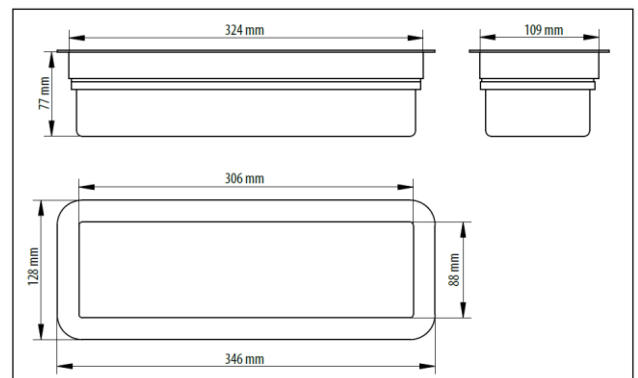

|                         |                                  |
|-------------------------|----------------------------------|
| <b>Luminaire</b>        | Addressable with central battery |
| <b>Mounting</b>         | Concealable                      |
| <b>Lamp</b>             | LED/50 000h                      |
| <b>Lamp power</b>       | 3W                               |
| <b>Warranty</b>         | 2 years repair warranty          |
| <b>Standby duration</b> | -                                |
| <b>Housing</b>          | Polycarbonate                    |
| <b>Color of housing</b> | White                            |
| <b>Operation</b>        | Standby                          |
| <b>Mains supply</b>     | 120-240 VAC 50-60 Hz             |
| <b>Input current</b>    | 30mA                             |
| <b>Battery</b>          | Central battery                  |
| <b>Protection</b>       | IP65                             |
| <b>Certification</b>    | CE, TÜV, UL                      |

| CL-813<br>Mounting height (m) | Escape route 2m wide 1 lux min |                          |               |                | Open (anti-panic) area 0.5 lux min |                          |               |                |
|-------------------------------|--------------------------------|--------------------------|---------------|----------------|------------------------------------|--------------------------|---------------|----------------|
|                               | Transverse to wall             | Transverse to transverse | Axial to wall | Axial to Axial | Transverse to wall                 | Transverse to transverse | Axial to wall | Axial to Axial |
| 2.5                           | 3.39                           | 8.46                     | 2.89          | 7.28           | 4.23                               | 10.77                    | 3.64          | 8.93           |
| 3                             | 3.56                           | 9.02                     | 3.04          | 7.79           | 4.51                               | 11.53                    | 3.89          | 9.67           |
| 4                             | 3.59                           | 9.95                     | 3.22          | 8.5            | 4.97                               | 12.5                     | 4.25          | 10.82          |
| 6                             | 2.96                           | 10.02                    | 3.17          | 9.22           | 5.01                               | 14.31                    | 4.61          | 12.21          |
| 8                             | 0                              | 8.91                     | 0             | 9.26           | 4.45                               | 14.36                    | 4.63          | 12.94          |
| 10                            | 0                              | 4.68                     | 0             | 5.1            | 2.89                               | 13.52                    | 4.04          | 13.31          |
| 15                            | 0                              | 0                        | 0             | 0              | 0                                  | 4.24                     | 0             | 6.03           |