





CLEVER LIGHT CL-6016 SLAVE/CB

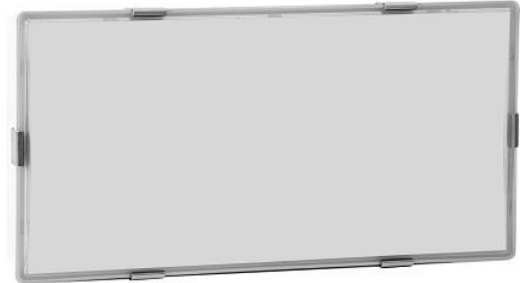

Luminaire	Addressable with central battery
Mounting	On sidewall or ceiling
Lamp	LED/50 000h
Lamp power	6W
Visual range	25 meters
Warranty	2 years repair warranty
Standby duration	-
Housing	Polycarbonate
Color of housing	White
Operation	Standby
Mains supply	120-240V 50-60 Hz
Input current	30mA
Battery	Central battery
Protection	IP65
Certification	CE, UL

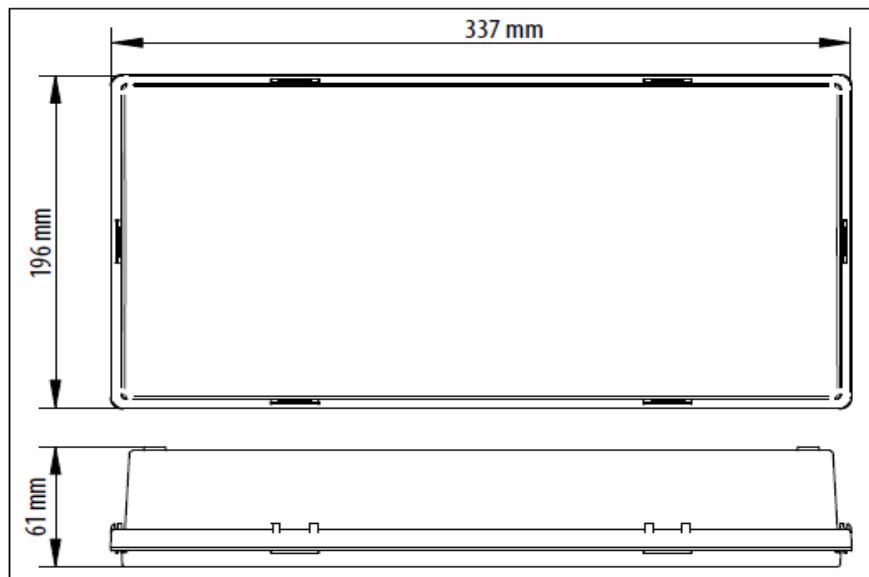

CL-6016	Escape route 2m wide 1 lux min				Open (anti-panic) area 0.5 lux min			
Mounting height (m)	Transverse to wall	Transverse to transverse	Axial to wall	Axial to Axial	Transverse to wall	Transverse to transverse	Axial to wall	Axial to Axial
2.5	4,29	9,47	4,15	9,94	2,16	6,07	2,12	5,97
3	4,44	10,87	4,17	11,08	2,06	6,13	1,96	6,08
4	4,82	12,5	4,78	11,77	1,26	5,81	1,19	5,67
6	4,61	13,77	4,54	13,53	0	1,22	0	1,13
8	3,7	13,43	3,73	13,29	0	0	0	0
10	0	11,88	0	12,06	0	0	0	0
15	0	0	0	0	0	0	0	0